


Vacuum filters


FESTO



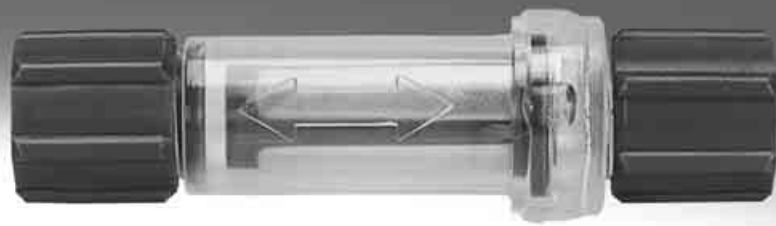

Vacuum filters ESF

Technical data

Function



-  - Temperature range
0 ... +60 °C
-  - Operating pressure
-0.95 ... +4 bar

Accessory for the suction gripper ESG, mounted between suction cup holder and suction cup with connection attachments

➔ Internet: [esg](#)



General technical data			
Classification of suction cup holders	Size 3		Size 4
			For suction cup Ø 20 mm
			For suction cup Ø 30/40/50 mm
Pneumatic connection	M4	M6	
Vacuum port	M4	M6	
Mounting position	Any		
Type of mounting	With male thread via vacuum port		
Grade of filtration	[µm]	10	
Flow rate ¹⁾	[l/min]	100	260
			270

1) At partial vacuum = -0.75 bar


Operating and environmental conditions	
Operating pressure	[bar] -0.95 ... +4
Operating medium	Atmospheric air based on ISO 8573-1:2010 [7:-:-]
Ambient temperature	[°C] 0 ... +60
Corrosion resistance class CRC ¹⁾	1

1) Corrosion resistance class CRC 1 to Festo standard FN 940070

Low corrosion stress. For dry indoor applications or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).

Materials	
Housing	Aluminium, nickel-plated brass
Filters	PVF
Seals	NBR
Note on materials	RoHS-compliant
	Free of copper and PTFE

Dimensions Download CAD data ➔ www.festo.com




Ordering data									
Classification of suction cup holders	D1	D2	D3	L1	L2	L3	Weight	Part No.	Type
	Ø		Ø				[g]		
Size 3	25	M4	7.8	10.5	4.5	3	9	191202	ESF-3
Size 4	25	M6	8.8	10.5	5.5	4	19	191203	ESF-4A
	40	M6	8.8	14	5.5	4	19	191204	ESF-4B

Vacuum filters VAF-PK

Technical data

Function



- - Temperature range
0 ... +40 °C
- - Operating pressure
-0.95 ... 0 bar



Note

Only for use in open vacuum systems.

The vacuum filter is used to filter particles in the direction of suction. The vacuum filter is inserted as an in-line filter in the tubing line. On initial

installation any flow direction can be chosen. After disassembly and installation of the vacuum filter the original

flow direction must be kept. The fabric filter element is located in a transparent housing so that the de-

gree of contamination of the filter cartridge can be identified. It is not possible to replace the filter.

General technical data			
Pneumatic connection	PK-3 with union nut	PK-4 with union nut	PK-6 with union nut
Nominal width [mm]	2	3	4,6
Mounting position	Any		
Type of mounting	In-line installation		
Grade of filtration [µm]	50		
Flow rate ¹⁾ [l/min.]	50,8	70	210
Ejector pulse suitability [bar]	≤8		

1) At partial vacuum = -0.75 bar

Operating and environmental conditions	
Operating pressure [bar]	-0.95 ... 0
Note on operating pressure	Only for use in open vacuum systems
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Ambient temperature [°C]	0 ... +40

Materials	
Housing	PA
Filters	Fabric, PA
Union nut	POM
Note on materials	RoHS-compliant

Dimensions

Download CAD data → www.festo.com


- 1 Quick connector for plastic tubing
- 2 Flow direction indicated with arrow
- 3 Degree of contamination visible through the transparent housing



Ordering data							
Connection	For tubing O.D.	D1 Ø	D2 Ø	L1	≈C 1	Weight [g]	Part No. Type
PK-3	4	16	12	50.8	8	4	535883 VAF-PK-3
PK-4	6	16	12	57	12	6	15889 VAF-PK-4
PK-6	8	24	19	64	14	10	160239 VAF-PK-6

Vacuum filters VAF-DB


Technical data

Function



-  - Temperature range
-5 ... +50 °C
-  - Operating pressure
-0.95 ... 0 bar



-  - Note
Only for use in open vacuum systems.

The vacuum filter is used to filter particles in the direction of suction. The filter cartridge is located in a transparent bowl so that the degree of

contamination of the filter cartridge can be identified. The filter cartridge can be replaced → 6.

General technical data			
Pneumatic connection	G $\frac{1}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$
Vacuum port	G $\frac{1}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$
Mounting position	Vertical		
Type of mounting	In-line installation Via wall/surface bracket → 6		
Grade of filtration [µm]	80		
Ejector pulse suitability [bar]	≤7		
Max. tightening torque [Nm]	8.7	15.3	20.5

Operating and environmental conditions	
Operating pressure [bar]	-0.95 ... 0
Note on operating pressure	Only for use in open vacuum systems
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Ambient temperature [°C]	-5 ... +50

Materials	
Housing	PP reinforced
Bowl	PA
Filters	PE
Seals	Nitrile rubber
Note on materials	RoHS-compliant Contains PWIS (paint-wetting impairment substances)


Vacuum filters VAF-DB

Technical data

Standard flow rate q_n as a function of differential pressure Δp_{1-2}




— VAF-DB-1/4

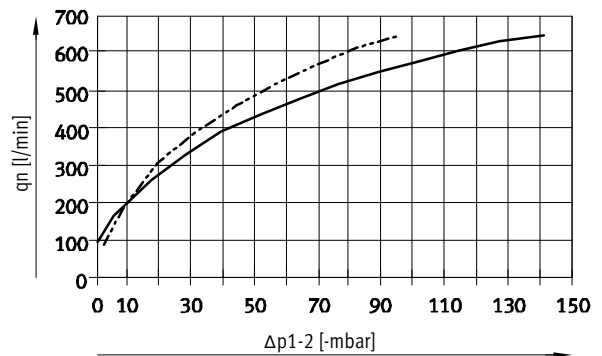

— VAF-DB-3/8
 - - - VAF-DB-1/2

Dimensions

Download CAD data → www.festo.com



Ordering data

Connection D1	B1	H1	H2	Weight [g]	Part No.	Type
1/4	75	94.5	84.5	71	547261	VAF-DB-1/4
3/8	90.5	125	113	156	553140	VAF-DB-3/8
1/2	90.5	129	115	162	553141	VAF-DB-1/2

Vacuum filters VAF-DB


Accessories

Mounting bracket VAF-DB-HR for vacuum filter VAF-DB

Type of mounting: threaded
Max. tightening torque: 0.63 Nm

Materials:
High-alloy stainless steel

Note on materials:
RoHS-compliant
Contains PWIS (paint-wetting
impairment substances)

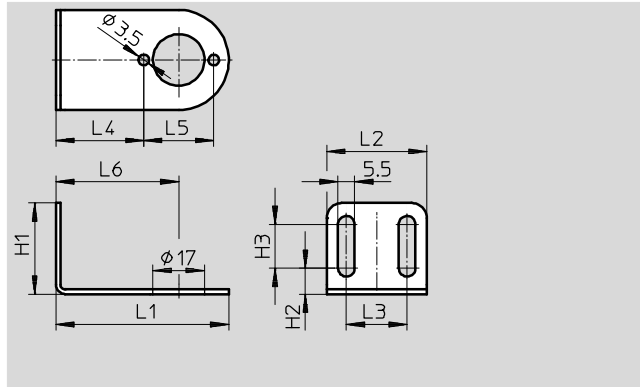

Dimensions and ordering data												
L1	L2	L3	L4	L5	L6	H1	H2	H3	CRC ¹⁾	Weight [g]	Part No.	Type
57	33	20	29	23	40.5	30	8.5	14.5	2	27	553144	VAF-DB-HR-1/8-1/4
80	53	35	37	33	53.5	50	13.5	24.5	2	92	553145	VAF-DB-HR-3/8-1/2

1) Corrosion resistance class CRC 2 to Festo standard FN 940070
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Filter cartridge VAF-DB-P for vacuum filter VAF-DB

Type of mounting: plug-in


Material: PE

Note on materials:
RoHS-compliant
Contains PWIS (paint-wetting
impairment substances)



Ordering data		
	Part No.	Type
For vacuum filters VAF-DB	553142	VAF-DB-P-1/8-1/4
	553143	VAF-DB-P-3/8-1/2

Festo North America

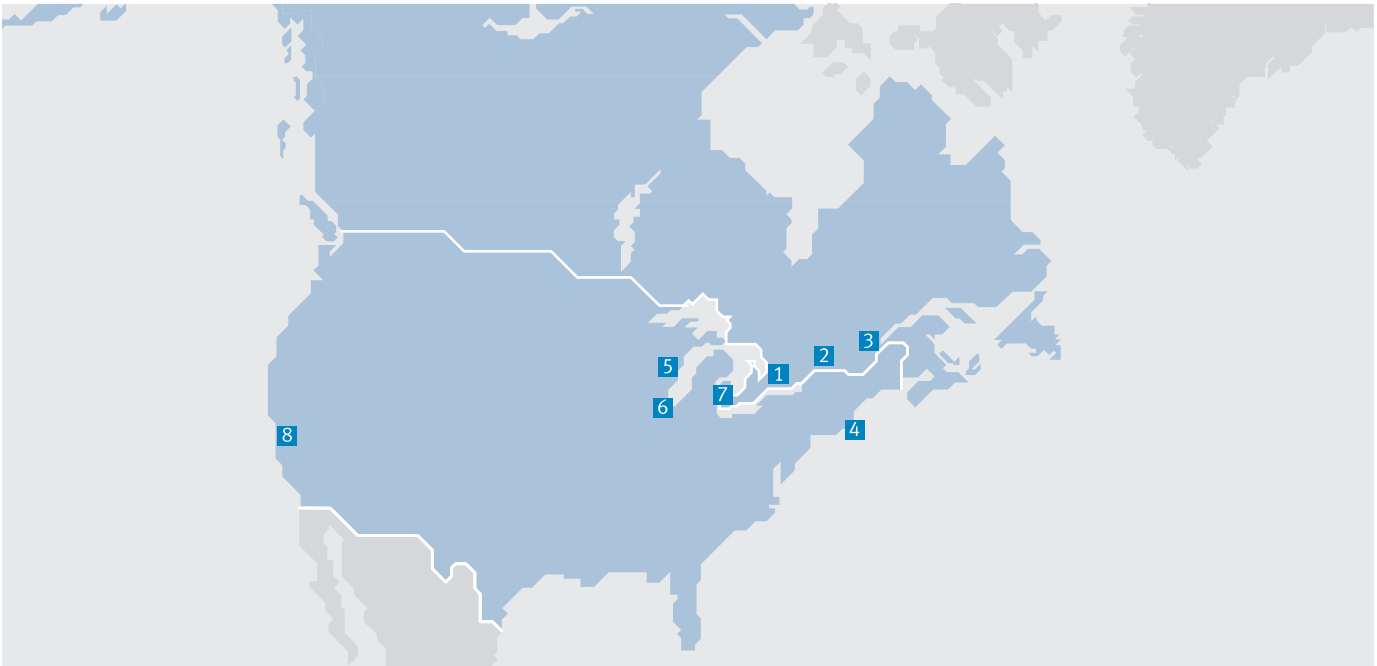

**1 Festo Canada
Headquarters
Festo Inc.**
5300 Explorer Drive
Mississauga, ON
L4W 5G4

2 Montréal
5600, Trans-Canada
Pointe-Claire, QC
H9R 1B6

3 Québec City
2930, rue Watt#117
Québec, QC
G1X 4G3



**4 Festo United States
Headquarters
Festo Corporation**
395 Moreland Road
Hauppauge, NY
11788

5 Appleton
North 922 Tower View Drive, Suite N
Greenville, WI
54942

7 Detroit
1441 West Long Lake Road
Troy, MI
48098

6 Chicago
85 W Algonquin - Suite 340
Arlington Heights, IL
60005

8 Silicon Valley
4935 Southfront Road, Suite F
Livermore, CA
94550

Festo Regional Contact Center

Canadian Customers

Commercial Support:
Tel: 1 877 GO FESTO (1 877 463 3786)
Fax: 1 877 FX FESTO (1 877 393 3786)
Email: festo.canada@ca.festo.com

Technical Support:
Tel: 1 866 GO FESTO (1 866 463 3786)
Fax: 1 877 FX FESTO (1 877 393 3786)
Email: technical.support@ca.festo.com

USA Customers

Commercial Support:
Tel: 1 800 99 FESTO (1 800 993 3786)
Fax: 1 800 96 FESTO (1 800 963 3786)
Email: customer.service@us.festo.com

Technical Support:
Tel: 1 866 GO FESTO (1 866 463 3786)
Fax: 1 800 96 FESTO (1 800 963 3786)
Email: product.support@us.festo.com